


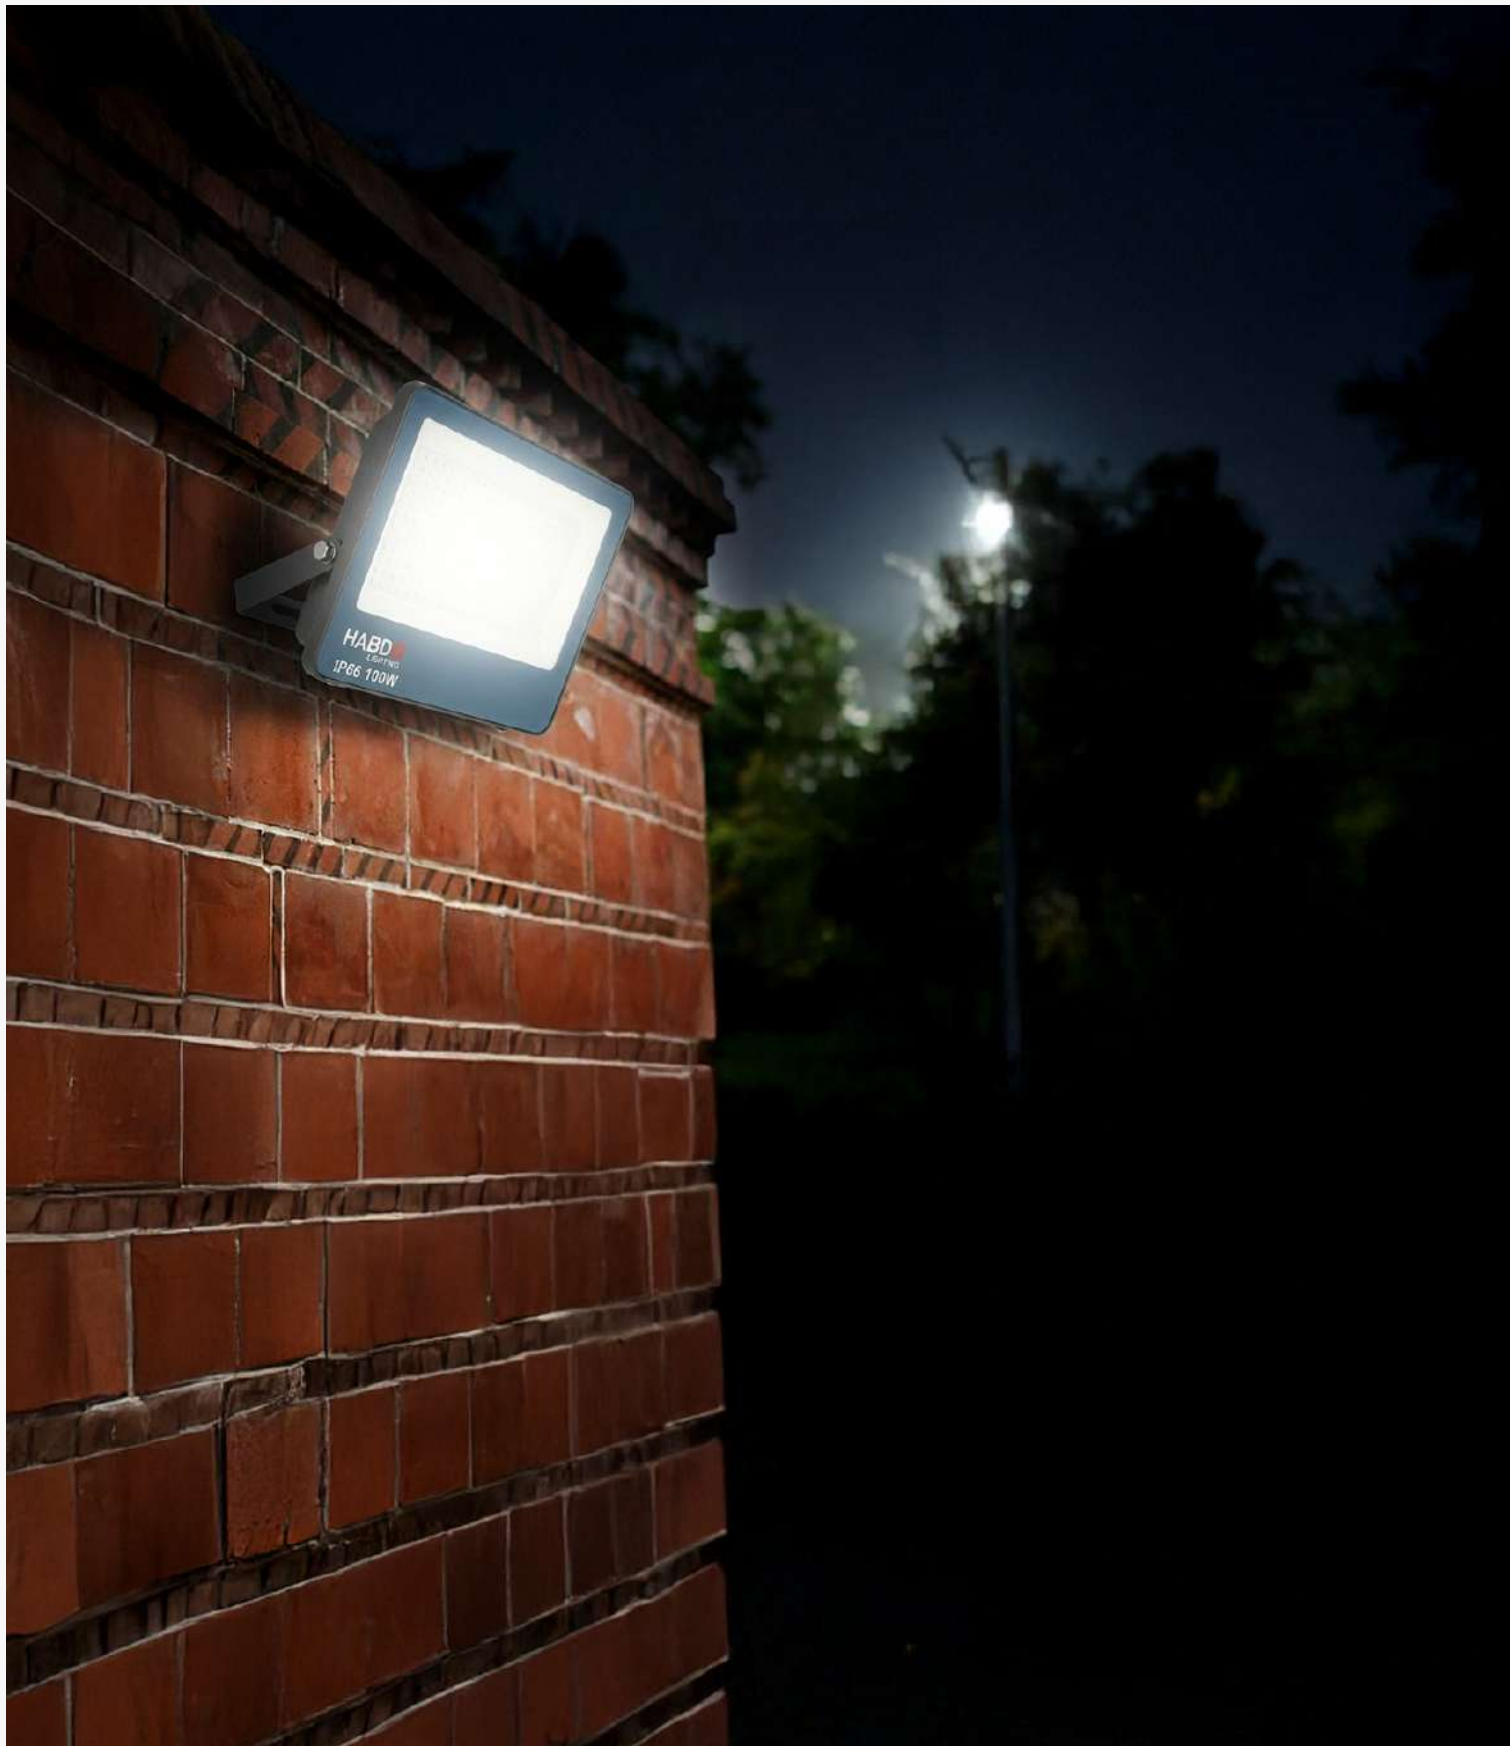

FLOOD LIGHT

lightingaddress.com

HABDO 
LIGHTING

CE ROHS SASO CB IP65

AREAS OF APPLICATION



Shopping Center



Commercial




Educational Center




SPECIFICATIONS

CODE NO.	WATT	LM\W	CCT	CRI	IP RATE	B.ANGLE	COVER	MATERIALS	TIME LIFE
1100203 - 1100204	10W	90LM\W	3000K 5000K	80	IP66	120°	FROSTED GLASS	ALUMINUM	25,000H
1100205 - 1100206	30W	100LM\W	3000K 5000K	80	IP66	120°	FROSTED GLASS	ALUMINUM	25,000H
1100207 - 1100208	50W	100LM\W	3000K 5000K	80	IP66	120°	FROSTED GLASS	ALUMINUM	25,000H
1100209 - 1100210	100W	100LM\W	3000K 5000K	80	IP66	120°	FROSTED GLASS	ALUMINUM	25,000H
1100211 - 1100212	150W	100LM\W	3000K 5000K	80	IP66	120°	FROSTED GLASS	ALUMINUM	25,000H
1100213 - 1100214	200W	100LM\W	3000K 5000K	80	IP66	120°	FROSTED GLASS	ALUMINUM	25,000H
1100215 - 1100216	300W	100LM\W	3000K 5000K	80	IP66	120°	FROSTED GLASS	ALUMINUM	25,000H

DIMENSIONS

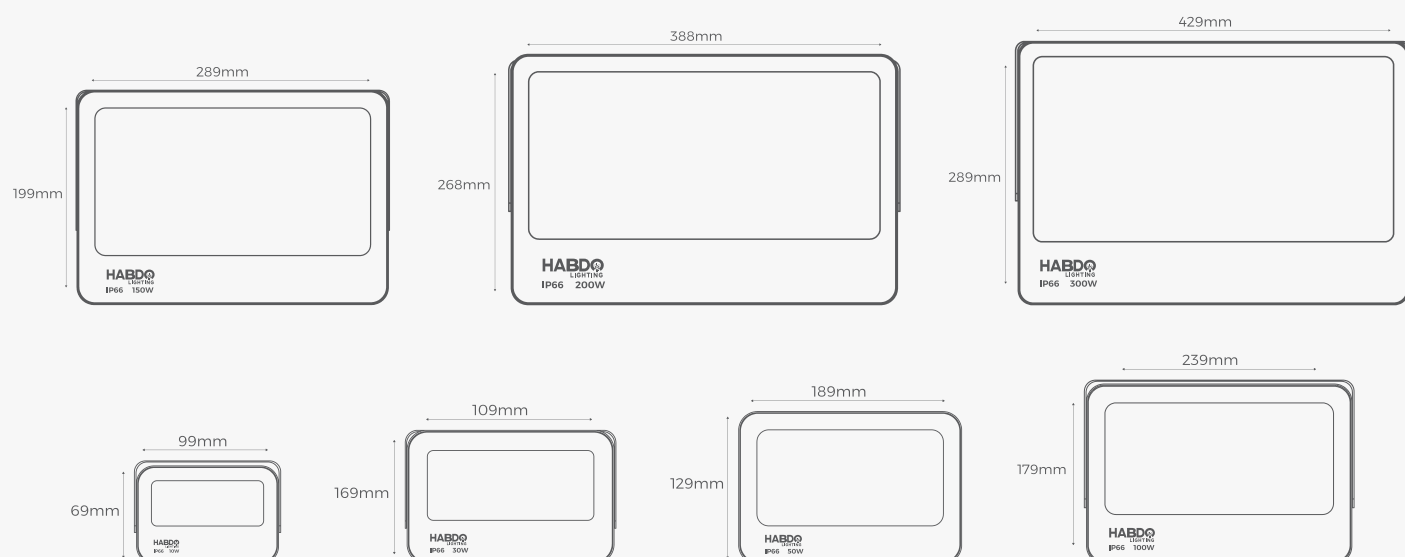

Overview of Product



⚠ Caution before installation

- Make sure all parts are ready before installation.
- When installing the lamp please avoid overstretching the wire.
- Keep the distance from flammable materials at least 0.2m.
- Make sure the low and high voltage wires are separated.
- Disconnect the power supply before install the appliance.
- The flood light should be replaced immediately if it has any cracks or deterioration
- Do not disassemble the products as it will destroy the waterproof function.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- Must be installed by professional electrician, if not installed by professional electrician, the warranty will be void.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced

- تأكد من أن جميع الأجزاء جاهزة قبل التركيب.
- عند تركيب المصباح، يُرجى تجنب شد السلك بشكل مفرط.
- حافظ على مسافة لا تقل عن ٠,٢ متر من المواد القابلة للاشتعال.
- تأكد من فصل الأسلاك ذات الجهد المنخفض عن الأسلاك ذات الجهد العالي.
- افصل مصدر الطاقة قبل تركيب الجهاز.
- يجب استبدال كشاف الإضاءة فوراً إذا كان به أي تشققات أو تدهور.
- لا تقم بفك أجزاء المنتج، لأن ذلك سيتلف خاصية مقاومة الماء.
- لا يمكن استبدال السلك أو الكابل الخارجي المرن لهذا المصباح؛ وإذا تعرض للتلف، يجب التخلص من المصباح بالكامل.
- يجب أن يتم التركيب بواسطة كهربائي محترف، وإذا لم يتم التركيب بواسطة كهربائي محترف فسُتعتبر الضمانة لاغية.
- مصدر الضوء في هذا المصباح غير قابل للاستبدال؛ وعند انتهاء عمر مصدر الضوء، يجب استبدال المصباح بالكامل.



Tel: 8001188889
Wep: lightingaddress.com
Email: support@lightingaddress.co

