الرجاء منكم متابعة المعلومات بجدية قبل بدء التركيب

اضمن عزل مفتاح الكهرباء قبل التركيب.

عزل الإكسسوارات الموجودة، افحص توافق الأطراف النهائية والعلبة الخلفية (انظر إلى خلف الصفحة)، ربما تتغير التجهيزات.

اضمن النوع والمواصفات الصحيحة للكابل. عند وجود أكثر سلكين في نفس الطرف النهائي مع استعمال الإكسسوارات القديمة، اضمن حفظها في نفس الطرف النهائي مع الإكسسوارات الجديدة.

راجع شكل الدائرة الكهربائية لتجهيز الأسلاك. (الصفحة الخلفية)

جهز الحشية البلاستيكية قبل تركيب إكسسوارات النحاس أو الكروم الجديدة.

بعد تصنيع الموصلات. جهز الإكسسوارات الجديد بلطف إلى العلبة الجدارية. اضمن عدم حصر الأسلاك. ثم جهز المسمار بشكل تام لضمان عدم تشويه اللوحة الأمامية بعد الإكمال.

الأسلاك الرئيسية 240 فولت: السلك الناري "L": أحمر

السلك المحايد "N": أسود

سلك التأريض ⏚ : أخضر أو أخضر/أصفر

يجب تغطية كوابل التأريض العارية مع الغلاف الأخضر/الأصفر وتوصل الأسلاك بطرف التأريض

إن كان أي سؤال فاستفسر فني كهربائي مؤهل

المعلومات الهام

يجب تأريض المنتج حسب قواعد الأسلاك IEE الحالية.

على أن تجهز الحشية البلاستيكية في وقاية أي معاملة كيميائية (مثل تلويث لوحة النحاس الاصفر)

بالنسبة إلى تنظيف/تلميع هذا المنتج، استعمل قماش تنظيف ناعم فقط

لا يناسب هذا المنتج التركيب في الخارج أو في مناطق رطوبة عالية

تستعمل جميع المدخلات في مجال المنتج مصنوعة حسب المواصفات البريطانية المتعلقة.

احفظ هذه التعليمات للمراجعة في المستقبل

دوائر المفتاح الأحادية الطريق (العلبة الخلفية أصغر عمق 16 مم)

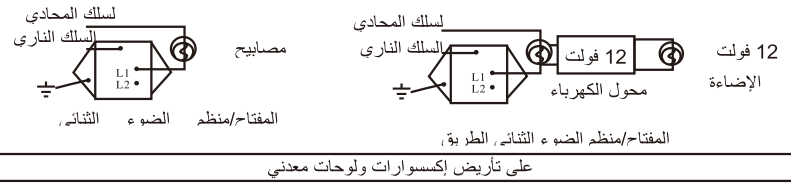

على تأريض إكسسوارات ولوحات معدني

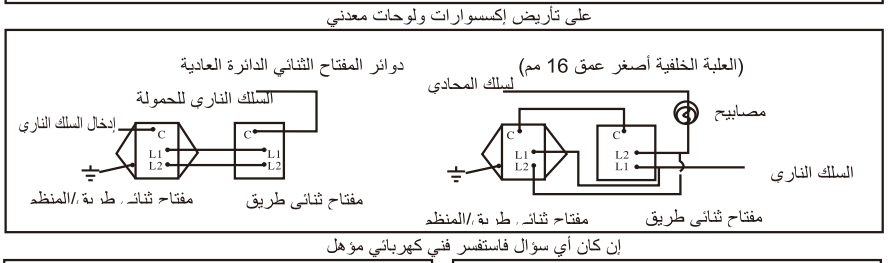

إن كان أي سؤال فاستفسر فني كهربائي مؤهل

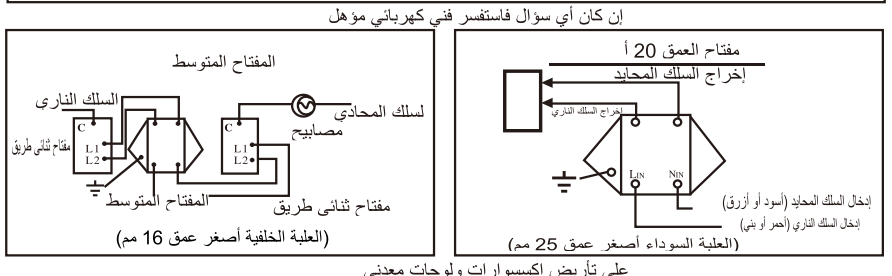

على تأريض إكسسوارات ولوحات معدني

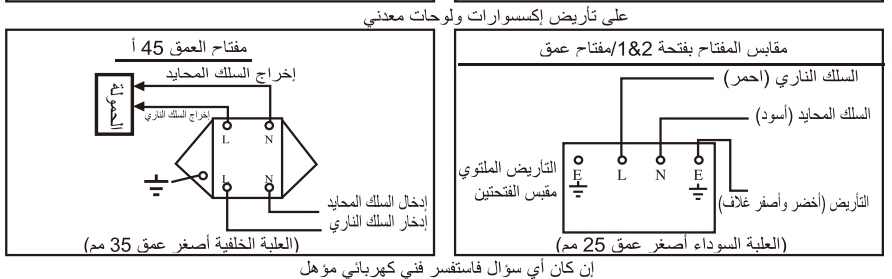

إن كان أي سؤال فاستفسر فني كهربائي مؤهل

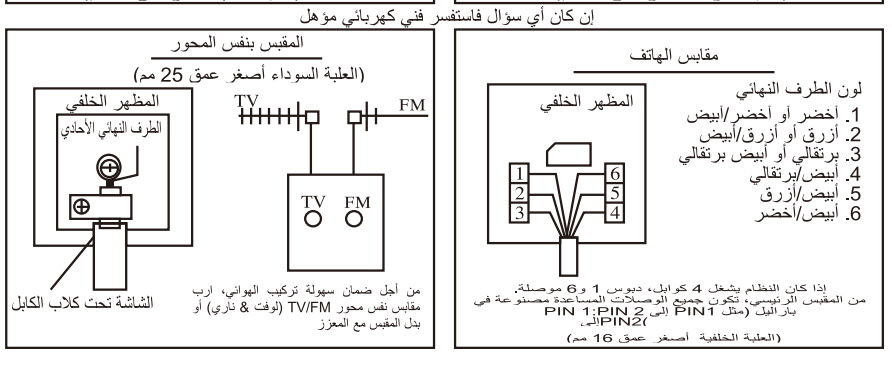

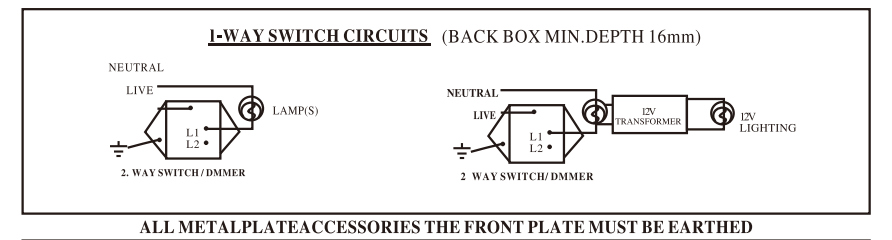

ALL METALPLATEACCESSORIES THE FRONT PLATE MUST BE EARTHED

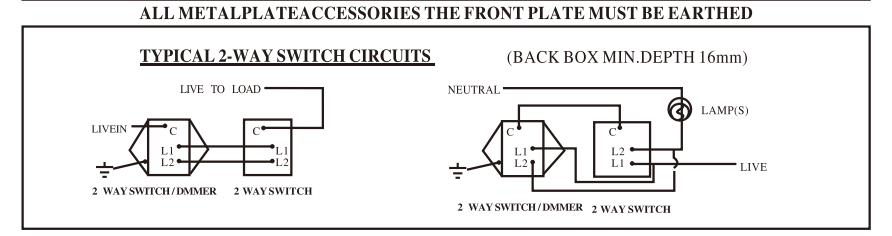

IF IN ANY DOUBT CONSULT A QUALIFIED ELECTRICIAN

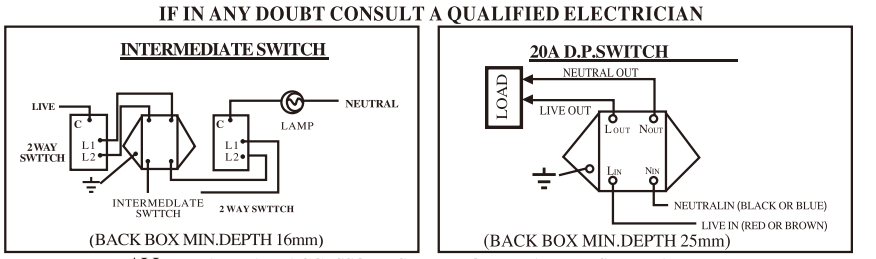

ALL METALPLATEACCESSORIES THE FRONT PLATE MUST BE EARTHED

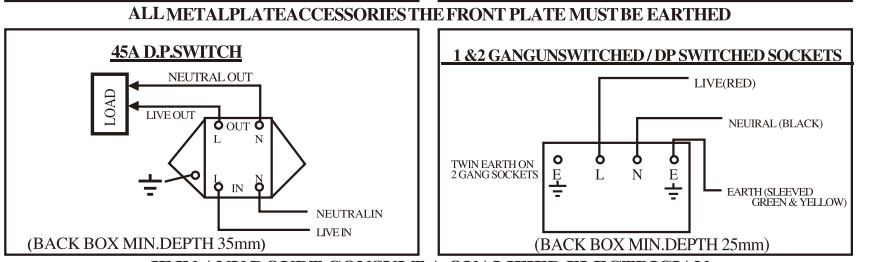

IF IN ANY DOUBT CONSULT A QUALIFIED ELECTRICIAN

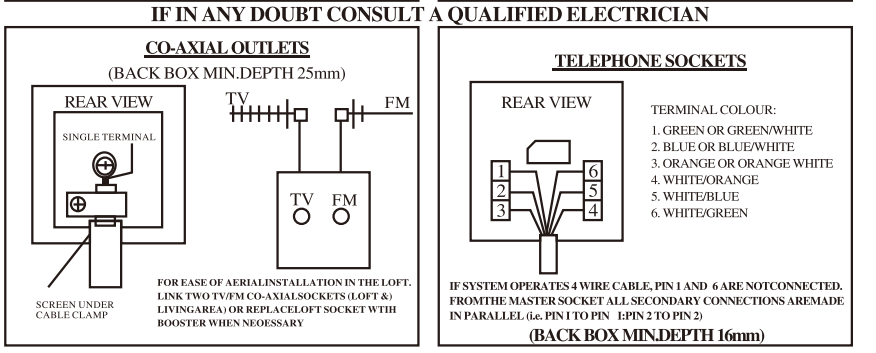

PLEASE READ THE FOLLOWING INFORMATION CAREFULLY BEFORE COMMENCING INSTALLATION

ENSURE THAT THE MAINS SUPPLY SWITCH IS ISOLATED BEFORE COMMENCING.

REMOVE EXISTING ACCESSORY,CHECKING LAYOUT OF THRMINALS,AND BACK BOX COMPATIBILITY (SEE OVERLEAF), AS BIFFERENT FITTINGS MAY V ARY.

ENSURE THAT THE CABLE IS OF THE CORRECT TYPE AND RATING. WHEN MORE THAN TWO WIRES IN THE SAME TERMINALARE USED IN THE OLD ACCESSORY, MAKE SURE THESE ARE KEPT TOGETHER IN THE SAME TERMINAL OF THE NEW ACCESSORY.

REFER TO TYPICAL CIRCUIT DIAGR AMS FOR WIRING. (OVERLEAF)

ENSURE PLASTIC GASKET IS FITTED, PRIOR TO INSTALLATION OF THE NEW BRASS OR CHROME ACCESSORY

AFTER MAKING THE CONNECTIONS. SCREW THE NEW ACCESSORY GENTLY TO THE W ALL BOX, ENSURING NO WITES ARE TRAPPED, THEN SCREW FULLY HOME MAKING SURE WHEN DONE SO THE FRONT PLATE IS NOT DISTORTED.

240V MAINS WIRING:	LIVE 'L':	RED
	NEUTRAL 'N':	BLACK
	EARTH ⏚:	GREEN OR GREEN/YELLOW

BARE EARTH CABLES MUST ALWAYS BE COVERED WITH GR/YELLOW SLEEVING AND WIRED TO EARTH TERMINAL

IF IN ANY DOUBT CONSULT A QUALIFIED ELECTRICIAN

GENERAL INFORMATION

THIS PRODUCT MUST BE EARTHED IN ACCORDANCE WITH THE CURRENT IEE WIRING REGULATIONS

THE PLASTIC GASKET **MUST BE FITTED** TO PREVENT ANY CHEMICAL REACTION (i.e.TARNISHING OF THE BRASS PLATE)

FOR CLEANING/POLISHING OF THIS PRODUCT,USE ONL Y A SOFT CLEAN CLOTH

THIS PRODUCT IS NOT SUITABLE FOR INSTALLATION OUTDOORS OR IN AREAS OF HIGH HUMIDITY

ALL INSERTS USED IN THIS PRODUCT RANGE ARE MANUFACTURED IN ACCORDANCE WITH THE RELEVANT BRITISH STANDARDS

RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.