LED Tri-proof Light

GWL1008

PRODUCT DATASHEET

50W



Product Features

- Double color co-extrusion batten, integrated molding, more beautiful appearance;
- High strength, not easy to bend;
- The lamp can replace the traditional T8 tri-proof lights with higher light efficiency and more than 80% energy saving;
- High performance LED chips, high lumen efficiency and low light decay;
- IP65 dustproof and waterproof grade;
- The lamp has a breathing valve to prevent the difference in internal and external pressure from absorbing water;
- No UV, infrared radiation, no mercury environmental protection.

Application

- Underground, outdoor parking lot
- Basement
- Tunnel
- Corridor
- High humidity environment and place



© Copyright 2021. All rights reserved by MEGAMAN.,

LED Tri-proof Light

GWL1008

PRODUCT DATASHEET

50W

General Information Data


Electrical parameters	
Rated Voltage	100-240VAC
Rated Frequency	50/60Hz
Safety Class	Class Ⅱ
Life Data	
Life Time(L70)	25000h
Switch Times	＞12500
Operation Data	
IP	IP65
Operating Temperature	-20°C~+40°C
Storage Temperature	-20°C~+60°C
Mechanical Data	
Housing Material	PC
Cover Material	PC
Other	
SDCM	＜6
Certification	SASO2902/CB/ROHS



Base Specification

Model	Watts (W)	PF	Luminous Flux (lm)	Efficacy (lm/W)	Ra	Beam Angle
GWL1008 50W 6500K	50W	0.9	4500	90	80	120°
GWL1008 50W 4000K	50W	0.9	4500	90	80	120°
GWL1008 50W 3000K	50W	0.9	4000	80	80	120°

Photometric Diagram

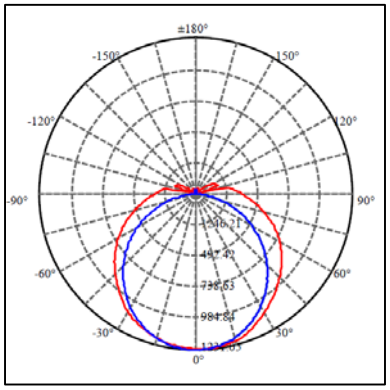

© Copyright 2021. All rights reserved by MEGAMAN.,


LED Tri-proof Light

GWL1008

PRODUCT DATASHEET

50W

Dimensional Drawing

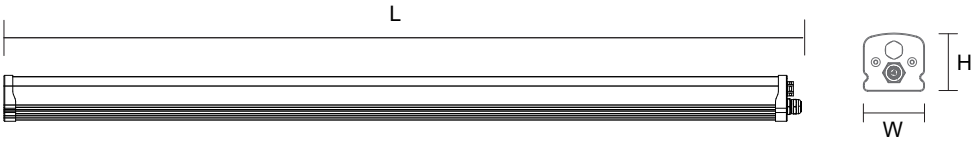

Model	L(mm)	W(mm)	H(mm)
GWL1008 50W	1200	66	63

Packaging Information

Model	Single Box Dimensions (L*W*H)mm	Outer Box Dimensions (L*W*H)mm	Packaging Unit (PCS/CTN)
GWL1008 50W	1250*72*69	1265*300*162	8

© Copyright 2021. All rights reserved by MEGAMAN.,