

H
HAINZO

Touch, open your ideal life



ABDULAZIZ AHMED ABDULAZIZ AL GHAITH

Address: Buraida Hay Al Rayan Riyadh (Al) Saudi Arabia

TEL: +966 540955509


E-mail : moman6@hotmail.com



صنعت خصيصاً لمجموعة الغيث للتجارة

Specially made for Al Ghaith Trading Group

H
HAINZO

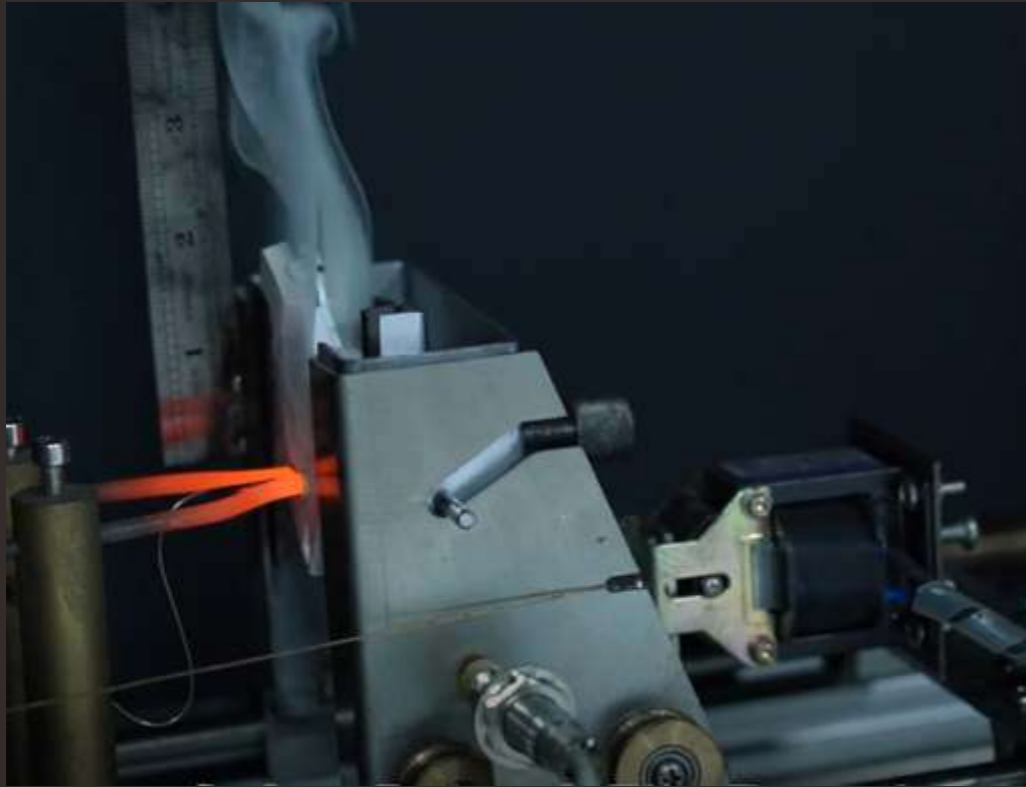



DESCRIPTION	DETAILS
Product Description	HAINZO SIZE 7X7 1GANG 1WAY 16A WIDE SWITCH
Product Catalog No.	H2301
Standard	IEC60669-1:2017
Rated Current	16A max
Rated Voltage	250V AC
Frequency	50/60Hz
Product Dimensions	86x86mm
Accessories	Mounting screws-2xM3.5
Mounting	Flush Mounting
Fixing Center	80mm
Auxiliary fixing options	4 Corners
Mounting box size	35mm
Actuating member	Rocker
Endurance	40000
Enclosure Material	PC
Contact material	Copper
Terminal for current carrying part	Phosphor copper 90-92%
Screw terminal	Steel
Terminal Identifier	COM,L
Conductor size	1-4mm ²
Terminal Capacity	1.5X3mm ² 2.5X2mm ² 4X1mm ²
Tightening torque	1.2Nm
Screw size	M4

H
HAINZO



H2301





DESCRIPTION	DETAILS
Product Description	HAINZO SIZE 7X7 2GANG 1WAY 16A WIDE SWITCH
Product Catalog No.	H2303
Standard	IEC60669-1:2017
Rated Current	16A max
Rated Voltage	250V AC
Frequency	50/60Hz
Product Dimensions	86x86mm
Accessories	Mouting screws-2xM3.5
Mounting	Flush Mounting
Fixing Center	80mm
Auxiliary fixing options	4 Corners
Mounting box size	35mm
Actuating member	Rocker
Endurance	40000
Enclosure Material	PC
Contact material	Copper
Terminal for current carrying part	Phosphor copper 90-92%
Screw terminal	Steel
Terminal Identifier	COM,L
Conductor size	1-4mm ²
Terminal Capacity	1.5X3mm ² 2.5X2mm ² 4X1mm ²
Tightening torque	1.2Nm
Screw size	M4

H
HAINZO



H2303





HAINZO

DESCRIPTION	DETAILS
Product Description	HAINZO SIZE 7X7 3GANG 1WAY 16A WIDE SWITCH
Product Catalog No.	H2305
Standard	IEC60669-1:2017
Rated Current	16A max
Rated Voltage	250V AC
Frequency	50/60Hz
Product Dimensions	86x86mm
Accessories	Mouting screws-2xM3.5
Mounting	Flush Mounting
Fixing Center	80mm
Auxiliary fixing options	4 Corners
Mounting box size	35mm
Actuating member	Rocker
Endurance	40000
Enclosure Material	PC
Contact material	Copper
Terminal for current carrying part	Phosphor copper 90-92%
Screw terminal	Steel
Terminal Identifier	COM,L
Conductor size	1-4mm ²
Terminal Capacity	1.5X3mm ² 2.5X2mm ² 4X1mm ²
Tightening torque	1.2Nm
Screw size	M4



H2305





HAINZO



H2324

DESCRIPTION	DETAILS
Product Description	HAINZO SIZE 7X7 4GANG 1WAY 16A WIDE SWITCH 20A DOUBLE POLE SWITCH WITH LED
Product Catalog No.	H2324
Standard	IEC60669-1:2017
Rated Current	20A max
Rated Voltage	250V AC
Frequency	50/60Hz
Product Dimensions	86x86mm
Accessories	Mouting screws-2xM3.5
Mounting	Flush Mounting
Fixing Center	80mm
Auxiliary fixing options	4 Corners
Mounting box size	35mm
Actuating member	Rocker
Endurance	40000
Enclosure Material	PC
Contact material	Copper
Terminal for current carrying part	Red copper 99.9%
Screw terminal	Brass 62%
Terminal Identifier	LINE L,LOAD L and LINE N,LOAD N
Conductor size	2.5-6mm ²
Terminal Capacity	1.5X3mm ² 2.5X2mm ² 4X1mm ²
Tightening torque	2Nm
Screw size	M5





HAINZO



H2327

DESCRIPTION	DETAILS
Product Description	HAINZO SIZE 7X7 45A DOUBLE POLE SWITCH WITH LED
Product Catalog No.	H2327
Standard	IEC60669-1:2017
Rated Current	45A max
Rated Voltage	250V AC
Frequency	50/60Hz
Product Dimensions	86x86mm
Accessories	Mouting screws-2xM3.5
Mounting	Flush Mounting
Fixing Center	80mm
Auxiliary fixing options	4 Corners
Mounting box size	35mm
Actuating member	Rocker
Endurance	40000
Enclosure Material	PC
Contact material	Copper
Terminal for current carrying part	Red copper 99.9%
Screw terminal	Brass 62%
Terminal Identifier	LINE L,LOAD L and LINE N,LOAD N
Conductor size	4mm ² -16mm ²
Terminal Capacity	1.5X3mm ² 2.5X2mm ² 4X1mm ²
Tightening torque	2.0Nm
Screw size	M5





DESCRIPTION	DETAILS
Product Description	HAINZO SIZE 7X14 45A DOUBLE POLE SWITCH WITH LED
Product Catalog No.	H2329
Standard	IEC60669-1:2017
Rated Current	45A max
Rated Voltage	250V AC
Frequency	50/60Hz
Product Dimensions	86x86mm
Accessories	Mounting screws-2xM3.5
Mounting	Flush Mounting
Fixing Center	80mm
Auxiliary fixing options	4 Corners
Mounting box size	35mm
Actuating member	Rocker
Endurance	10000
Enclosure Material	PC
Contact material	Copper
Terminal for current carrying part	Red copper 99.9%
Screw terminal	Brass 62%
Terminal Identifier	LINE L,LOAD L and LINE N,LOAD N
Conductor size	4mm ² -16mm ²
Terminal Capacity	1.5X3mm ² 2.5X2mm ² 4X1mm ²
Tightening torque	2.0Nm
Screw size	M5

HAINZO



H2329





DESCRIPTION	DETAILS
Product Description	HAINZO SIZE 7X7 1GANG 13A SOCKET With(double pole) switch and LED
Product Catalog No.	H2407
Standard	SASO 2203:2018 BS 1363-2
Rated Current	13A
Rated Voltage	250V AC
Frequency	50/60Hz
Product Dimensions	86x86mm
Accessories	Mouting screws-2xM3.5
Mounting	Flush Mounting
Fixing Center	80mm
Auxiliary fixing options	4 Corners
Mounting box size	35mm
Actuating member	Rocker
Endurance	15000
Enclosure Material	PC
Contact material	Copper
Terminal for current carrying part	Red copper 99.9%
Screw terminal	Steel
Terminal Identifier	L,N&E
Conductor size	2.5mm ² -4mm ²
Terminal Capacity	1.5X3mm ² 2.5X2mm ² 4X1mm ²
Tightening torque	2.0Nm
Screw size	M5

H
HAINZO



H2407





HAINZO



H2427

DESCRIPTION	DETAILS
Product Description	HAINZO SIZE 7X7 1GANG 13A SOCKET
Product Catalog No.	H2427
Standard	SASO 2203:2018 BS 1363-2
Rated Current	13A
Rated Voltage	250V AC
Frequency	50/60Hz
Product Dimensions	86x86mm
Accessories	Mouting screws-2xM3.5
Mounting	Flush Mounting
Fixing Center	80mm
Auxiliary fixing options	4 Corners
Mounting box size	35mm
Actuating member	Rocker
Endurance	15000
Enclosure Material	PC
Contact material	Copper
Terminal for current carrying part	Red copper 99.9%
Screw terminal	Steel
Terminal Identifier	L,N&E
Conductor size	2.5mm ² -4mm ²
Terminal Capacity	1.5X3mm ² 2.5X2mm ² 4X1mm ²
Tightening torque	2.0Nm
Screw size	M5





DESCRIPTION	DETAILS
Product Description	HAINZO SIZE 7X14 DOUBLE 13A SOCKET With(double pole)switch and LED
Product Catalog No.	H2408
Standard	SASO 2203:2018 BS 1363-2
Rated Current	13A
Rated Voltage	250V AC
Frequency	50/60Hz
Product Dimensions	146x86mm
Accessories	Mounting screws-2xM3.5
Mounting	Flush Mounting
Fixing Center	80mm
Auxiliary fixing options	4 Corners
Mounting box size	35mm
Actuating member	Rocker
Endurance	15000
Enclosure Material	Pa66 With GF 25%(Housing) PA66 unfilled(Housing COVER) and PC(Clip on Plate)
Contact material	Copper
Terminal for current carrying part	Red copper 99.9%
Screw terminal	Steel
Terminal Identifier	L,N&E
Conductor size	2.5mm ² -4mm ²
Terminal Capacity	1.5X3mm ² 2.5X2mm ² 4X1mm ²
Tightening torque	2.0Nm
Screw size	M5

H
HAINZO



H2408

