



WALL WASHER LIGHTING

CE ROHS BIS IK08 IP66

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial




Educational Center

SPECIFICATIONS

CODE NO.	WATT	LIUMEN	VOLTAG	CCT	CRI	IP RATE	BEAM ANGLE	DIMENSIONS	TIME LIFE
11011100	36W	3240LM	220AC	3000K	80	IP66	30°	1000*30*27MM	30,000H

DIMENSIONS

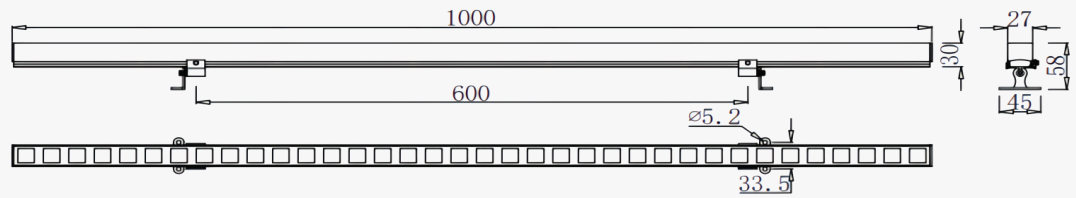


11011100

SPECIFICATIONS

CODE NO.	WATT	LIUMEN	VOLTAG	CCT	CRI	IP RATE	BEAM ANGLE	DIMENSIONS	TIME LIFE
11011101	18W	1620LM	220AC	3000K	80	IP66	30°	501*30*27MM	30,000H

DIMENSIONS

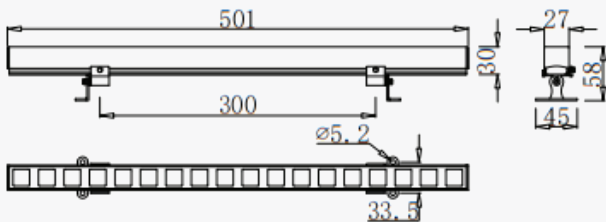


11011101


SPECIFICATIONS

CODE NO.	WATT	LIUMEN	VOLTAG	CCT	CRI	IP RATE	BEAM ANGLE	DIMENSIONS	TIME LIFE
11011102	12W	1080LM	220AC	3000K	80	IP66	30°	280*30*27MM	30,000H


DIMENSIONS

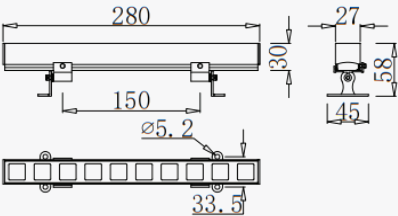

11011102

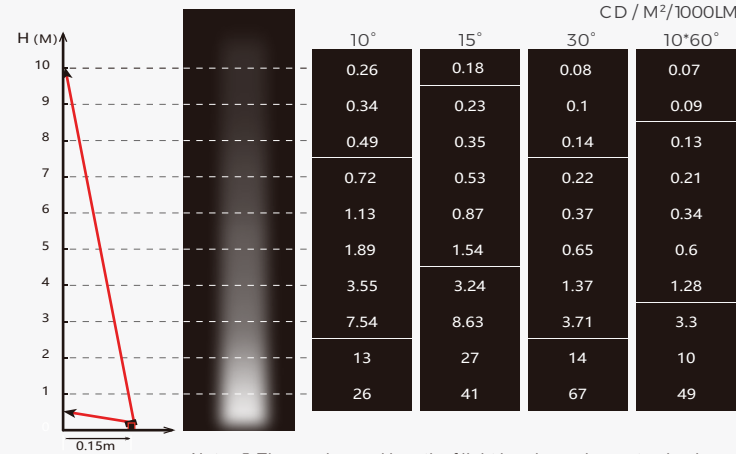

Note: ① The number and length of light beads can be customized according to demand
②Optional Anti Glare visor

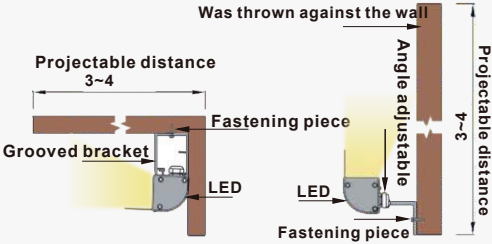

APPLICATION PICTURE

