





TRICOLOR UNDER CABINET LIGHTS

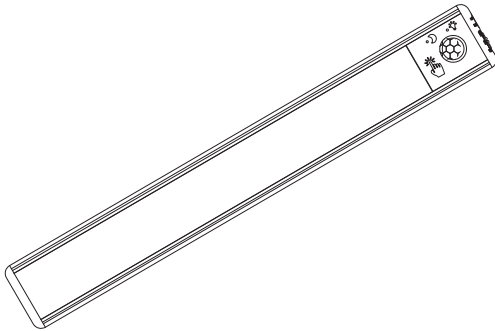


Before using the product, please read the manual carefully

Induction Range

The automatic sensing range is 5-6m/120°
20 seconds no action automatically shut down

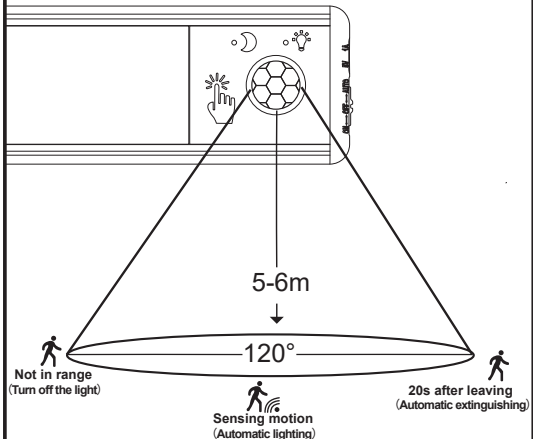

Operation guide

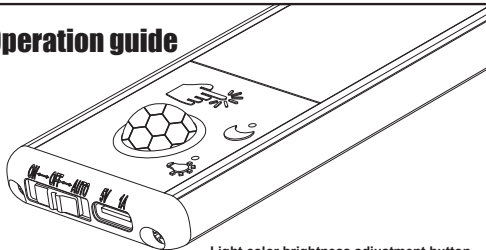

Light mode adjustment switch

Light color brightness adjustment button

Three modes:

ON Constant light mode

Motion sensing mode

Light sensing and motion sensing modes

OFF Turn off the lights

Light color brightness adjustment button:

Short press to switch the color temperature, respectively
3000k-4000k-6500k

Long press to realize 0%-100% stepless dimming

Installation instructions


Stick the lamp directly on the iron surface



Ferrous surface




It can be installed on the non-ferrous surface by pasting iron sheet and cooperating with the magnet of the lamp.
Before installation, ensure that the installation surface is clean and flat



Adsorb the pasted iron sheet to the back of the lamp



Non ferrous surface



Tear off the sticker on the back of the iron sheet
and install the lamp where needed