



Data Sheet

ELEGANT HIGHBAY


Description


The ELEGANT high bay series combines style, performance, and durability, offering an energy-efficient solution with an impressive 120 lumens per watt. Built with a robust die-cast aluminium body and an IP65 rating, these high bays are designed to perform in demanding environments.

The integrated Driver on Board (DOB) design simplifies installation and maintenance, while the 10KV surge protection ensures safety and reliability. With a 2-year warranty, ELEGANT delivers high-quality lighting tailored for industrial and commercial applications.

Model No. : RHDOB

Product Overview

Family Name	ELEGANT
Application	Warehouse, parking lot, gymnasiums
Mounting Type	Suspended
Housing	Aluminum
Body Color	Black
Efficacy	120LM/W
Color Rendering Index (CRI)	Ra>80
Color Temperature (CCT)	4000K / 5700K
Ingress protection	65
Beam Angle	90°
Rated Voltage	110-240V
Frequency	50/60HZ
Displacement Factor	0.9
LED chip Type	SMD
Operating Temp	45°C
Lifetime	30000H
Warranty	2Years
Certification	 SASO 2902 - IECCE

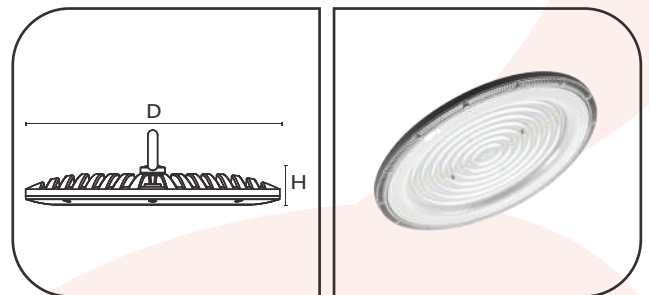

Product Specification

Model No.	Power	CCT	Total lumen	Dimensions DxH
RHDOB-80/4K	80W	4000K	9600LM	260x32mm
RHDOB-80/5.7K	80W	5700K	9600LM	260x32mm
RHDOB-120/4K	120W	4000K	14400LM	300x32mm
RHDOB-120/5.7K	120W	5700K	14400LM	300x32mm
RHDOB-150/4K	150W	4000K	18750LM	330x32mm
RHDOB-150/5.7K	150W	5700K	18750LM	330x32mm